


## Cross Section

Cross section shown intended to show flow paths only. Not representative of all valve configurations offered by Pneumadyne

*Rely on Pneumadyne's fluid power expertise, design experience and manufacturing capabilities when developing your fluid handling applications*

### 3-Way Normally Closed

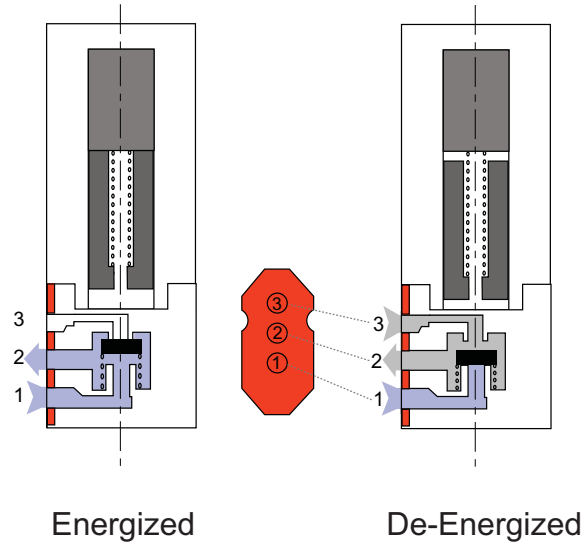

## 3-Way Normally Closed 15 mm Solenoid

### Function

In the energized position, the internal armature is lifted allowing flow through port 1 and out port 2. The orifice to port 3 is blocked preventing exhaust flow.

In the de-energized position, the armature covers the orifice, blocking flow at port 1. Exhaust flows through port 3.