


Cross Section

Cross section shown intended to show flow paths only. Not representative of all valve configurations offered by Pneumadyne

Rely on Pneumadyne's fluid power expertise, design experience and manufacturing capabilities when developing your fluid handling applications

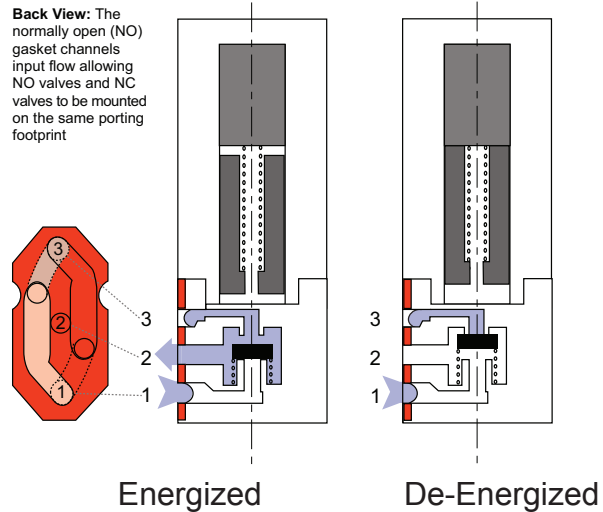

3-Way Normally Open 15 mm Solenoid

Function

In the energized position the internal armature covers the orifice, blocking flow at port 1. Exhaust flows through port 3.

In the de-energized position, the armature is lifted allowing flow through port 1 and out port 2. The orifice to port 3 is blocked preventing exhaust flow.