


Inline Manifolds-New Materials

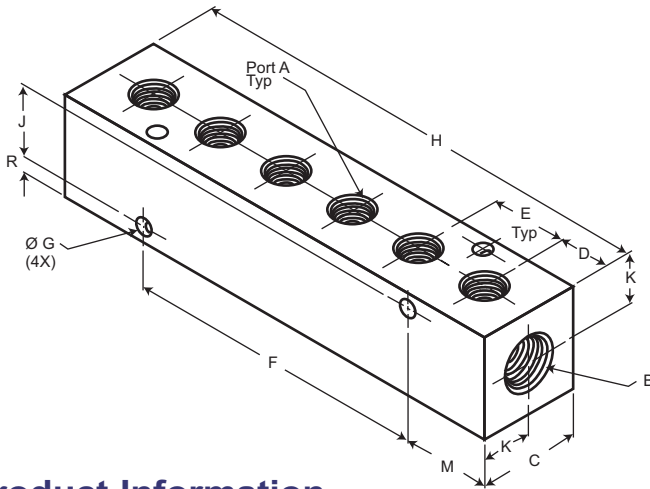

Port Options

Input

- 1/4 NPT (F)
- 3/8 NPT (F)

Output

- 1/8 NPT (F)
- 1/4 NPT (F)



- 2 to 10 stations
- Two input ports
- Convenient junction point
- Variety of port sizes

Product Information

1/4 NPT (F) Input x 1/8 NPT (F) Output

Part Number	No. of Stations	A	NPT B	C	D	E	F	G	H	J	K	M	R
M10-125-2-*	2	1/8	1/4	1.00	.50	.75	N/A	.17	1.75	.70	.50	.88	.15
M10-125-3-*	3	1/8	1/4	1.00	.50	.75	.75	.17	2.50	.70	.50	.88	.15
M10-125-4-*	4	1/8	1/4	1.00	.50	.75	1.50	.17	3.25	.70	.50	.88	.15
M10-125-5-*	5	1/8	1/4	1.00	.50	.75	2.25	.17	4.00	.70	.50	.88	.15
M10-125-6-*	6	1/8	1/4	1.00	.50	.75	3.00	.17	4.75	.70	.50	.88	.15
M10-125-7-*	7	1/8	1/4	1.00	.50	.75	3.75	.17	5.50	.70	.50	.88	.15
M10-125-8-*	8	1/8	1/4	1.00	.50	.75	4.50	.17	6.25	.70	.50	.88	.15
M10-125-9-*	9	1/8	1/4	1.00	.50	.75	5.25	.17	7.00	.70	.50	.88	.15
M10-125-10-*	10	1/8	1/4	1.00	.50	.75	6.00	.17	7.75	.70	.50	.88	.15

3/8 NPT (F) Input x 1/4 NPT (F) Output

Part Number	*	A	NPT B	C	D	E	F	G	H	J	K	M	R
M20-250-2-*	2	1/4	3/8	1.25	.63	.88	N/A	.20	2.13	.89	.63	1.06	.18
M20-250-3-*	3	1/4	3/8	1.25	.63	.88	.88	.20	3.00	.89	.63	1.06	.18
M20-250-4-*	4	1/4	3/8	1.25	.63	.88	1.75	.20	3.88	.89	.63	1.06	.18
M20-250-5-*	5	1/4	3/8	1.25	.63	.88	2.63	.20	4.75	.89	.63	1.06	.18
M20-250-6-*	6	1/4	3/8	1.25	.63	.88	3.50	.20	5.63	.89	.63	1.06	.18
M20-250-7-*	7	1/4	3/8	1.25	.63	.88	4.38	.20	6.50	.89	.63	1.06	.18
M20-250-8-*	8	1/4	3/8	1.25	.63	.88	5.25	.20	7.38	.89	.63	1.06	.18
M20-250-9-*	9	1/4	3/8	1.25	.63	.88	6.13	.20	8.25	.89	.63	1.06	.18
M20-250-10-*	10	1/4	3/8	1.25	.63	.88	7.00	.20	9.13	.89	.63	1.06	.18

* Number of stations

● Measurements in inches

● When design makes a dimension critical- contact factory for confirmation. All dimensions shown subject to change without notice.

New Manifold Material

Pneumadyne's Inline Manifolds are now available in 303 Stainless Steel, Brass, Polypropylene and Nylon. The Brass and Stainless Steel manifolds are extremely durable and offered for use with air, water and hydraulic oils. Stainless Steel is also ideal for highly corrosive environments. Choose Polypropylene or Nylon when using air, water or other compatible media in lower pressure applications.

Two to 10 station manifolds are available with 1/4 or 3/8 NPT (F) input ports and 1/8 or 1/4 NPT (F) output ports. Simply thread fittings into the ports to produce an organized method of supplying multiple lines from a single source.

Ordering Information

- To order New Material Manifolds replace the "*" in the Product Information listing with the desired material abbreviation.

SS= 303 Stainless Steel

BRS= Brass

NYN= Nylon

PPN= Polypropylene